


Derating Curve

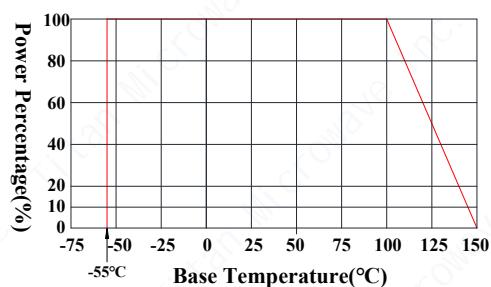

Datasheet

Model Number : TFMT3016

Flanged Mount Termination, DC-3GHz, 300W

Specifications

Frequency Range	DC-3GHz
VSWR	1.2 max
Nominal Power Handling	300W
Resistance	50 Ohms Standard
Resistance Tolerance	±5% Standard
Temperature Coefficient	< 150ppm/°C
Substrate Material	Beryllium Oxide(BeO)
Hat Material	Aluminum Oxide(Al_2O_3)
Flange	Nickel-plated Copper
Lead	99.99% Sterling Silver
Dimensions	30×16×5.135mm
Operating Temperature	-55°C~+150°C
RoHS Status	RoHS Compliant

Outline Drawing [mm]:

