

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

TECHNICAL DATA

► Electrical Characteristic

Frequency Range	DC~18GHz
Impedance	50 Ohms
VSWR	1.20 max
Insertion Loss	0.04 \sqrt{f} (GHz)dB max
Dielectric Withstand Voltage	2000Vrms
Contact Resistance	Center Contact: 3m Ω max Outer Contact: 5m Ω max
Insulation Resistance	5000M Ω min
Mating Cycles	500 min

► Material & Finishing


Center Conductor	Beryllium Copper, Gold Plating
Outer Conductor	Passivated Stainless Steel
Insulators	PTFE & PEI

► Mechanical

Force to Engage/Disengage	0.23Nm max
Recommended Mating Torque	N: 0.79Nm~1.13Nm
	TNCA: 0.45Nm~0.68Nm

► Environmental

Vibration	Method 204, test condition D
Shock	Method 213, test condition I
Thermal Shock	Method 107, test condition B
Corrosion (Salt Spray)	Method 101, test condition B
Moisture Resistance	Method 106, Insulation Resistance \geq 200M Ω

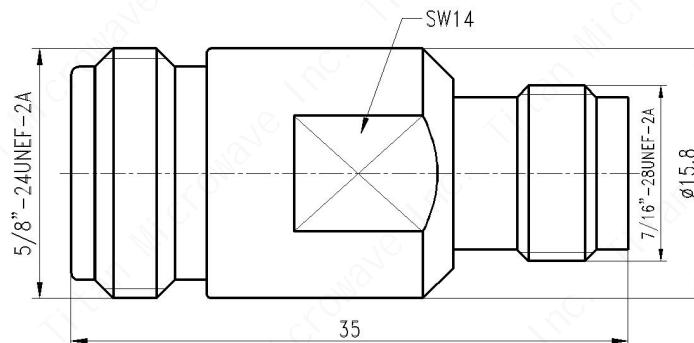

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22	TITLE: Coaxial Adapter, N-Female to TNCA- Female, Straight, DC~18GHz	PART No.: TMCANFGF	DIMENSIONS IN MILLIMETERS(mm)
ENGINEER: J. Zhu 26/03/22			
APPROVED: C. Chen 26/03/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A

 成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com