

TECHNICAL DATA

► Electrical Data

Frequency Range	1700~2700MHz
Insertion Loss	0.15dB max
VSWR	1.18:1 max
Isolation	22dB min
Phase Balance	$\pm 1^\circ$
Amplitude Balance	± 0.4 dB max
Power Handling	200W


► Mechanical Data

Dimensions	14.22×8.89×2mm
Connector Type	SMD
Surface Finish	Immersion Gols
	-provent surface from oxidation and scratch

► Environmental Data


Operating Temperature	-55℃~+105℃
-----------------------	------------

Pin Configuration




REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/11/22	C. Chen


Top View

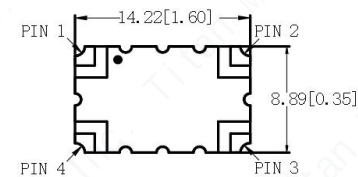

Side View



Bottom View

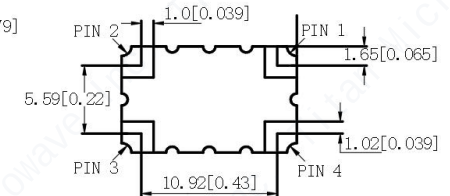

Configurati on	Pin 1	Pin 2	Pin 3	Pin 4
Splitter	Input	Isolated	-3dB $\angle$ 0-90°	-3dB $\angle$ 0
Splitter	Isolated	Input	-3dB $\angle$ 0	-3dB $\angle$ 0-90°
Splitter	-3dB $\angle$ 0-90°	-3dB $\angle$ 0	Input	Isolated
Splitter	-3dB $\angle$ 0	-3dB $\angle$ 0-90°	Isolated	Input
Combiner	A $\angle$ 0-90°	A $\angle$ 0	Isolated	Output
Combiner	A $\angle$ 0	A $\angle$ 0-90°	Output	Isolated
Combiner	Isolated	Output	A $\angle$ 0-90°	A $\angle$ 0
Combiner	Output	Isolated	A $\angle$ 0	A $\angle$ 0-90°

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 22/11/22
ENGINEER: J. Zhu 22/11/22
APPROVED: C. Chen 22/11/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ± 0.50 [0.019"]
.x ± 0.20 [0.008"]
.xx ± 0.10 [0.004"]
ANGLES $\pm 1^\circ$

TITLE:
SMD 3dB 90° High Power Hybrid Coupler, 1700~2700MHz, 200W
PART No.:
TMHC2200A03

 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
www.titan-microwave.com			
 DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A