

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	9.9~10.1GHz
Insertion Loss	0.3dB max
VSWR	1.15:1 max
Isolation	25dB min
Forward Power	30W
Reverse Power	10W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	13×19×12.7mm
Connector	SMA-Female
Material	Aluminum
Surface Finish	Nickel Plated
Weight	20g

► Environmental Data

Operating Temperature	-10℃~+60℃
Storage Temperature	-50℃~+90℃

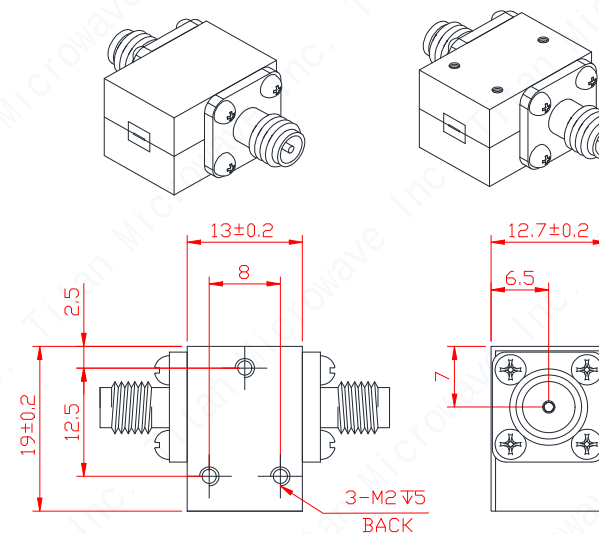

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23			TITLE: Coaxial Isolator 9.9-10.1GHz, 30W, SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
ENGINEER: J. Zhu 16/09/23				 DIMENSIONS IN MILLIMETERS(mm)			
APPROVED: C. Chen 16/09/23							
TOLERANCE UNLESS OTHERWISE SPECIFIED				www.titan-microwave.com			
x ±0.50 [0.019"]			PART No.: TMCI-09901010-30	SIZE: A4 SCALE: SHEET: 1/1 REV: A			
.x ±0.20 [0.008"]							
.xx ±0.10 [0.004"]							
ANGLES ±1°							

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	