

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	4~7.2GHz
Insertion Loss	0.5dB max
VSWR	1.3:1 max
Isolation	18dB min
Forward Power	100W
Reverse Power	20W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	21×22.5×15mm
Connector	SMA-Female
Material	Aluminum
Surface Finish	Nickel Plated
Weight	32g

► Environmental Data

Operating Temperature	-10℃~+60℃
Storage Temperature	-30℃~+70℃

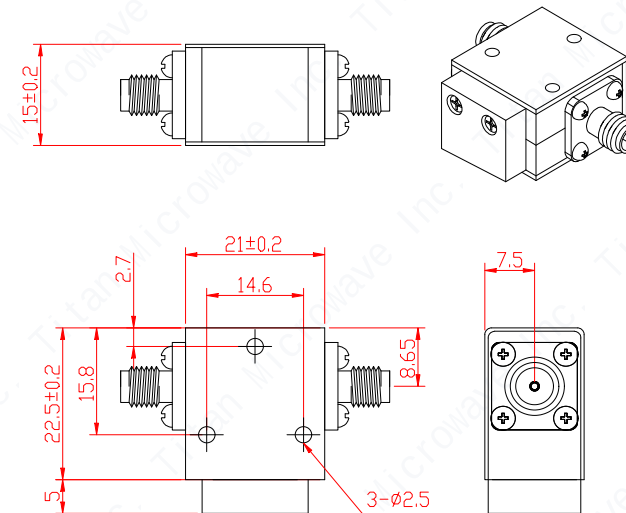

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23	TITLE: Coaxial Isolator 4-7.2GHz, 100W, SMA-Female	成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
ENGINEER: J. Zhu 16/09/23		www.titan-microwave.com			
APPROVED: C. Chen 16/09/23		DIMENSIONS IN MILLIMETERS(mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED					
x ±0.50 [0.019"]	PART No.: TMCI-04000720-100	SIZE:	SCALE:	SHEET:	REV:
.x ±0.20 [0.008"]		A4		1/1	A
.xx ±0.10 [0.004"]					
ANGLES ±1°					