

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	3~4GHz
Insertion Loss	0.4dB max
VSWR	1.2:1 max
Isolation	20dB min
Forward Power	150W
Reverse Power	100W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	25.4×28×14mm
Connector	SMA-Female
Material	Aluminum
Surface Finish	Nickel Plated
Weight	46g

► Environmental Data

Operating Temperature	-10℃~+60℃
Storage Temperature	-50℃~+90℃

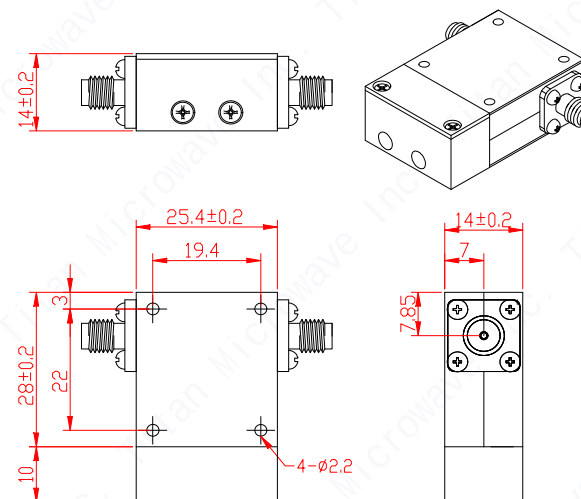

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23			TITLE: Coaxial Isolator 3-4GHz, 150W, SMA-Female PART No.: TMCI-03000400-150		成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -						
ENGINEER: J. Zhu 16/09/23					www.titan-microwave.com DIMENSIONS IN MILLIMETERS(mm)						
APPROVED: C. Chen 16/09/23											
TOLERANCE UNLESS OTHERWISE SPECIFIED											
x	±0.50	[0.019"]									
.x	±0.20	[0.008"]									
.xx	±0.10	[0.004"]									
ANGLES	±1°										
			SIZE:			SCALE:		SHEET:		REV:	
			A4					1/1		A	