

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2021/3/13	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	4~4.6GHz
Insertion Loss	0.4dB max
Isolation	20dB min
VSWR	1.25:1 max
Impedance	50 Ohms
Forward Power(CW)	150W
Reverse power	100W
Rotation	Clockwise


► Mechanical Data

Input/Output Connectors	SMA-Female
Material	Aluminum
Surface Treatment	Nicke Plated
Dimensions	25.4×28.5×15mm
Weight	75g

► Environmental Data

Operating Temperature	-30℃~+75℃
Storage Temperature	-50℃~+90℃

All the materials are RoHS Compliance

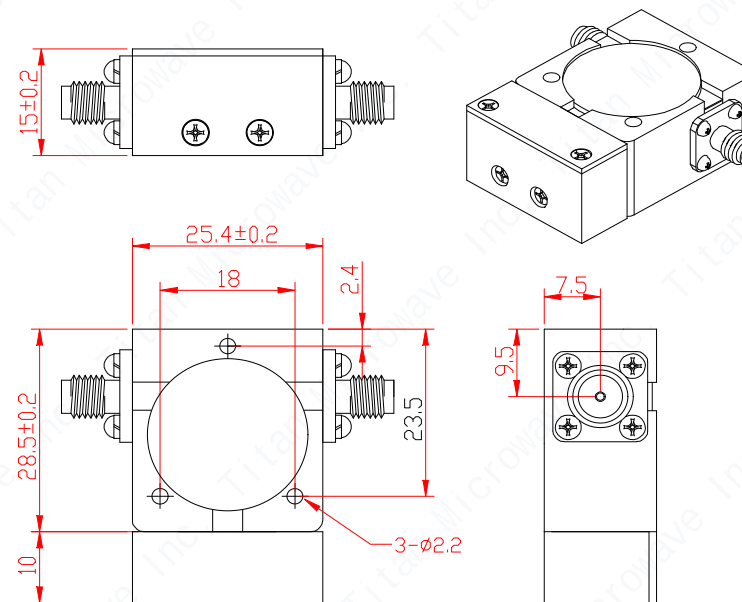

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 13/03/21			TITLE: Coaxial Isolator, 4~4.6GHz, 150W, SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
ENGINEER: J. Zhu 13/03/21				 DIMENSIONS IN MILLIMETERS(mm)			
APPROVED: C. Chen 13/03/21							
TOLERANCE UNLESS OTHERWISE SPECIFIED				www.titan-microwave.com			
x ±0.50 [0.019"]			PART No.: TMCI-04000460-150	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
.x ±0.20 [0.008"]							
.xx ±0.10 [0.004"]							
ANGLES ±1°							