


**TMPD4-02000600-600N**

**2 to 6 GHz, 600W, N-Female  
Non-Isolated, 4-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>Frequency Range</b>	2~6GHz
<b>Insertion Loss</b>	0.5dB max (excluding theoretical loss 6.0dB)
<b>Amplitude Balance</b>	± 0.3dB max
<b>Phase Balance</b>	± 4° max
<b>VSWR(sum port)</b>	1.4:1 max
<b>Impedance</b>	50 Ohms
<b>Power Handling</b>	600W(CW)

**Outline Drawing(mm)**

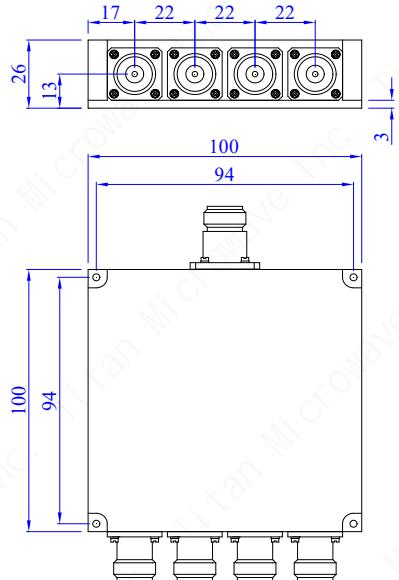

**Mechanical & Environmental Characteristics**

<b>Dimensions</b>	100 × 100 × 26mm
<b>RF Connectors</b>	N-Female
<b>Surface Finishing</b>	Silver Plated
<b>Operating Temperature</b>	-55°C~+85°C