

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2021/3/13	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	0.95~1.15GHz
Insertion Loss	0.4dB max
Isolation	20dB min
VSWR	1.25:1 max
Impedance	50 Ohms
Forward Power(CW)	150W
Reverse power	100W
Rotation	Clockwise


► Mechanical Data

Input/Output Connectors	SMA-Female
Material	Aluminum
Surface Treatment	Nicke Plated
Dimensions	25.4×28.5×15mm
Weight	75g

► Environmental Data

Operating Temperature	-30℃~+75℃
Storage Temperature	-50℃~+90℃

All the materials are RoHS Compliance

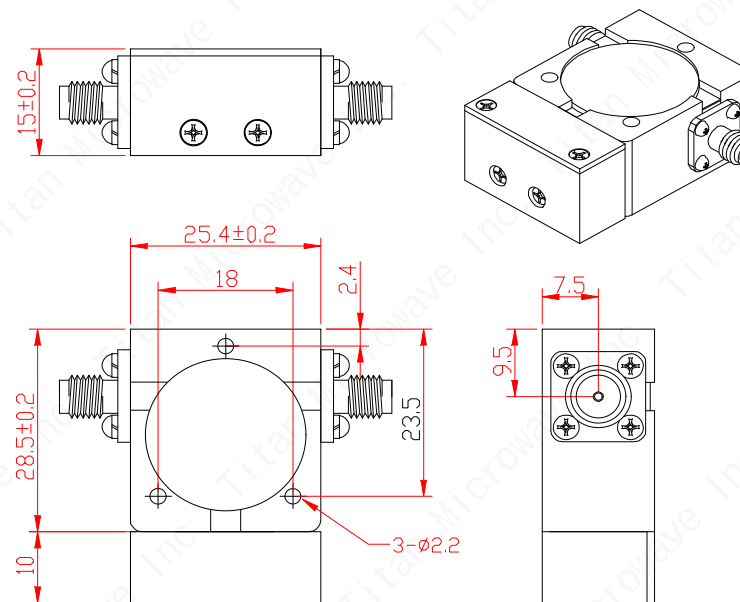

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 13/03/21			TITLE: Coaxial Isolator, 0.95~1.15GHz, 150W, SMA-Female	成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com				
ENGINEER: J. Zhu 13/03/21				DIMENSIONS IN MILLIMETERS(mm)	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
APPROVED: C. Chen 13/03/21								
TOLERANCE UNLESS OTHERWISE SPECIFIED								
x ±0.50 [0.019"]			PART No.: TMCI-00950115-150					
.x ±0.20 [0.008"]								
.xx ±0.10 [0.004"]								
ANGLES ±1°								