

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1.07~1.21GHz
Insertion Loss	0.5dB max
VSWR	1.3:1 max
Isolation	18dB min
Forward Power	100W
Reverse Power	20W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	19×19×8.6mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated
Weight	18g

► Environmental Data

Operating Temperature	-30℃~+75℃
Storage Temperature	-50℃~+90℃

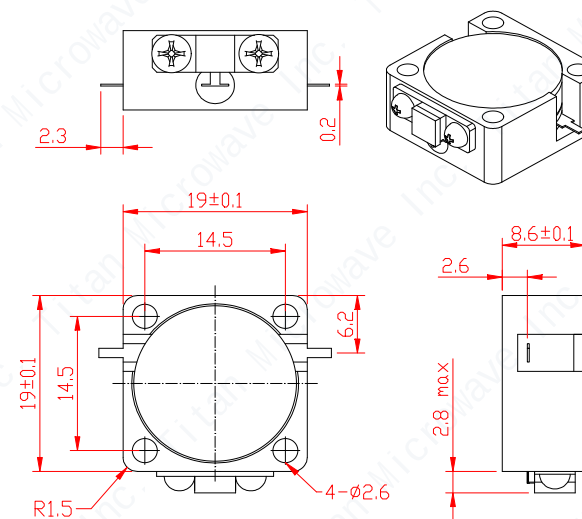

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23			TITLE: Drop-in Isolator 1.07-1.21GHz, Clockwise 100W	成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i> www.titan-microwave.com			
ENGINEER: J. Zhu 16/09/23							
APPROVED: C. Chen 16/09/23				DIMENSIONS IN MILLIMETERS(mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED							
x	±0.50	[0.019"]	PART No.: TMDI-100-01070121	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
.x	±0.20	[0.008"]					
.xx	±0.10	[0.004"]					
ANGLES	±1°						