

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	925~960MHz
Insertion Loss	0.35dB max
VSWR	1.2:1 max
Isolation	23dB min
Forward Power	100W
Reverse Power	100W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	20×27.5×8.6mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated
Weight	35g


► Environmental Data

Operating Temperature	-30℃~+75℃
Storage Temperature	-50℃~+90℃

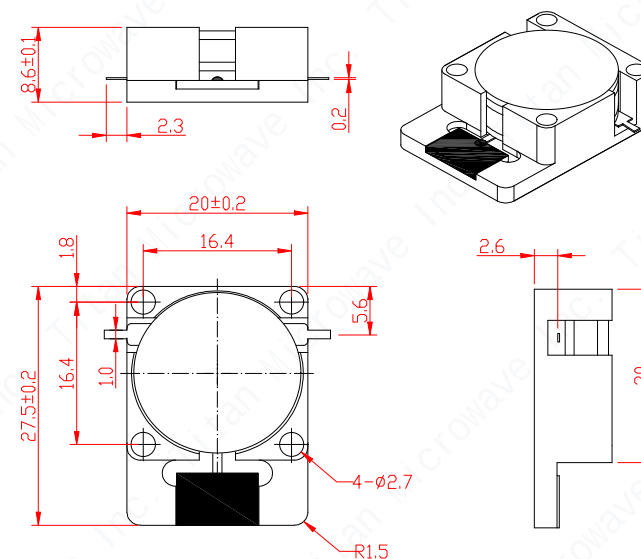

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23			TITLE: Drop-in Isolator 0.925~0.96GHz, Clockwise 100W		 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
ENGINEER: J. Zhu 16/09/23					www.titan-microwave.com			
APPROVED: C. Chen 16/09/23								
TOLERANCE UNLESS OTHERWISE SPECIFIED					PART No.: TMDI-100-00920096		 DIMENSIONS IN MILLIMETERS(mm)	
x ±0.50 [0.019"]								
.x ±0.20 [0.008"]								
.xx ±0.10 [0.004"]								
ANGLES ±1°					SIZE: A4	SCALE:	SHEET: 1/1	REV: A

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	