

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/4/7	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2600~3000MHz
Insertion Loss	0.5dB max
VSWR	1.3:1 max
Isolation	18dB min
Power	150W CW
Direction	Clockwise

► Mechanical Data

Connector Type	Drop-in
Surface Finish	Nickel Plated
Dimensions	25.4×25.4×10mm

► Environmental Data

Operating Temperature	-30℃~+70℃
-----------------------	-----------

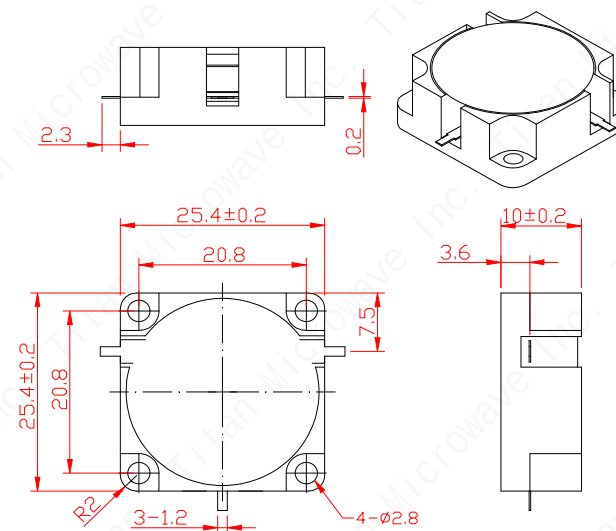

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 07/04/23			TITLE: Drop-in Circulator 2600~3000MHz, 150W, Clockwise	成都巨人微波 TITAN MICROWAVE INC. A Professional RF & Microwave Components Supplier www.titan-microwave.com				
ENGINEER: J. Zhu 07/04/23								
APPROVED: C. Chen 07/04/23								
TOLERANCE UNLESS OTHERWISE SPECIFIED								
x	±0.50	[0.019"]	PART No.: TMDC-02600300-150	DIMENSIONS IN MILLIMETERS(mm)	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
.x	±0.20	[0.008"]						
.xx	±0.10	[0.004"]						
ANGLES	±1°							