

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/3/24	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	6100~7000MHz
Nominal Coupling	10±1.0dB max
Coupling Flatness	±0.15dB max
Insertion Loss	0.5dB max
Main Line VSWR	1.2:1 max
Coupled Line VSWR	1.2:1 max
Directivity	20dB min
Impedance	50 Ohms
Power Rating	50W(CW)

► Mechanical Data

Input/Output Connectors	SMA-Female
Body Material	Aluminum
Surface Finish	Gray Painted
Dimensions	43×15×11mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

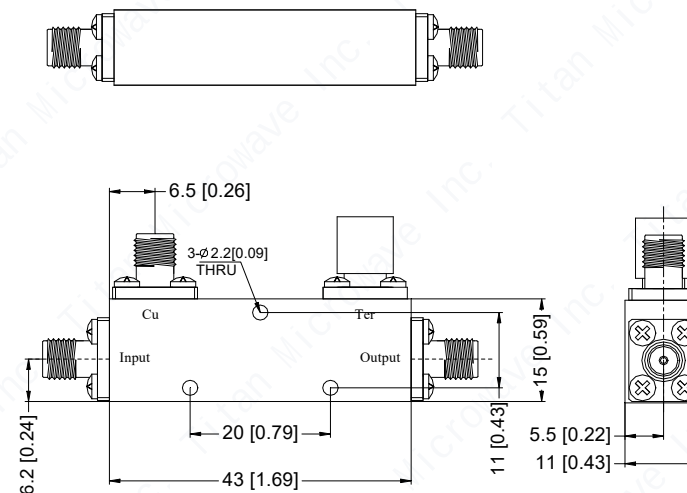

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 24/03/25
ENGINEER: J. Zhu 24/03/25
APPROVED: C. Chen 24/03/25
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:
Single Directional Coupler,
6.1~7GHz
Coupling 10dB, 50W
SMA-Female

PART No.:
TMDC-06100700-10S50



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------