

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	9KHz~260MHz
Coupling	50±1.0dB
Coupling Flatness	±0.5dB max
Insertion Loss	0.25dB max
Primary Line VSWR	1.2:1 max
Coupled Line VSWR	1.3:1 max
Directivity	18dB min@9~20KHz, 20dB min@20KHz~260MHz
Impedance	50 Ohms
Primary Line Power	4000W(CW)

► Mechanical Data

Primary Line Connectors	DIN 7/16(L29)-Male & Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	243.2×55.9×55.9mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

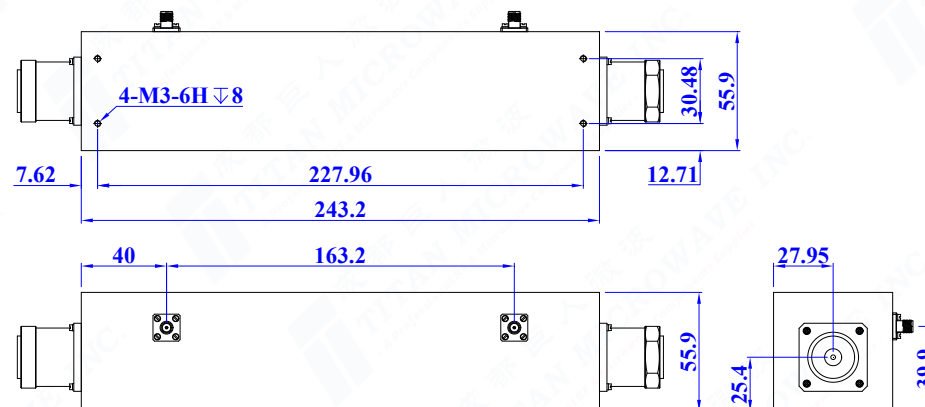

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 9KHz~260MHz, 50dB, 4000W, DIN 7/16(L29)-Male & Female & SMA-Female	成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com				
ENGINEER: J. Zhu 30/04/25				PART No.: TDDC-9K260M-50DS4KW	DIMENSIONS IN MILLIMETERS(mm)			
APPROVED: C. Chen 30/04/25								
TOLERANCE UNLESS OTHERWISE SPECIFIED								
x	±0.50	[0.019"]						
.x	±0.20	[0.008"]						
.xx	±0.10	[0.004"]						
ANGLES	±1°							