

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	10~100MHz
Coupling	50±1.0dB
Coupling Flatness	±0.5dB max
Insertion Loss	0.2dB max
VSWR	1.2:1 max
Directivity	18dB min
Impedance	50 Ohms
Primary Line Power	3500W(CW)

► Mechanical Data

Primary Line Connectors	DIN 7/16(L29)-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	152.4×55.9×55.9mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

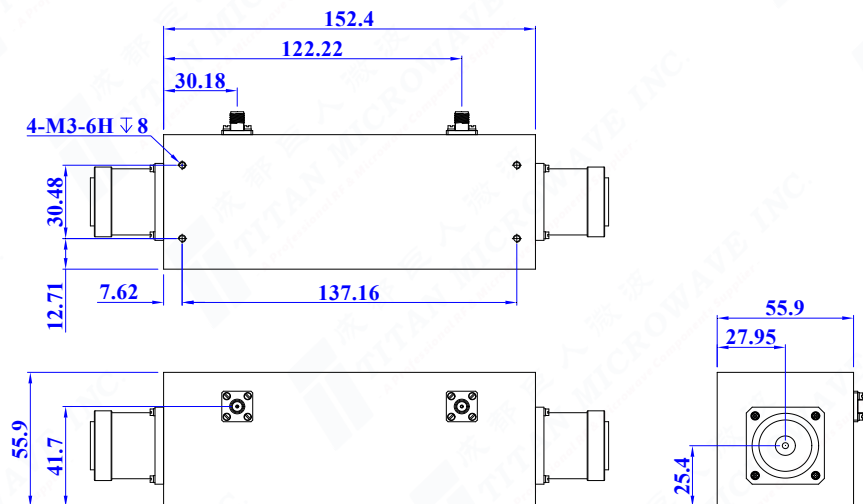

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 10~100MHz, 50dB, 3500W, DIN 7/16(L29)-Female & SMA-Female	成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com			
ENGINEER: J. Zhu 30/04/25							
APPROVED: C. Chen 30/04/25				 DIMENSIONS IN MILLIMETERS(mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED							
x	±0.50	[0.019"]	PART No.: TDDC-00010010-50DS3.5KW	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
.x	±0.20	[0.008"]					
.xx	±0.10	[0.004"]					
ANGLES	±1°						