

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	20~200MHz
Coupling	55±1.0dB max
Coupling Flatness	±1.0dB max
Insertion Loss	0.15dB max
Primary Line VSWR	1.2:1 max
Directivity	19dB min
Impedance	50 Ohms
Primary Line Power	2500W(CW), 6000W(PW)

► Mechanical Data

Primary Line Connectors	DIN 7/16(L29)-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	85×50×32mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

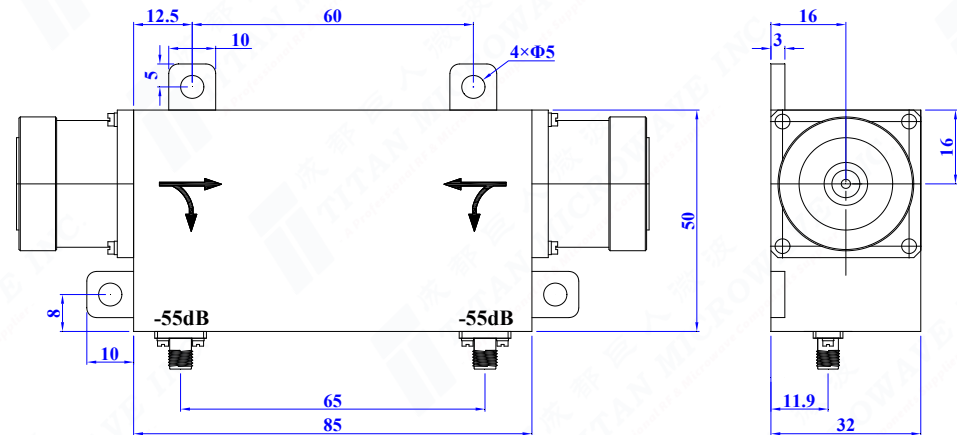

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 20~200MHz, 55dB, 2500W, DIN 7/16(L29)-Female & SMA-Female		成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com			
ENGINEER: J. Zhu 30/04/25								
APPROVED: C. Chen 30/04/25								
TOLERANCE UNLESS OTHERWISE SPECIFIED			PART No.: TDDC-00020020-55DS2.5KW		DIMENSIONS IN MILLIMETERS(mm) SIZE: A4 SCALE: SHEET: 1/1 REV: A			
x	±0.50	[0.019"]						
.x	±0.20	[0.008"]						
.xx	±0.10	[0.004"]						
ANGLES	±1°							