

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	12~18GHz
Coupling	35±1.0dB
Coupling Flatness	±1.0dB max
Insertion Loss	0.5dB max
Primary Line VSWR	1.5:1 max
Coupled Line VSWR	1.7:1 max
Directivity	10dB min
Impedance	50 Ohms
Primary Line Power	80W

► Mechanical Data

Primary Line Connectors	SMA-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	39×21×13mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

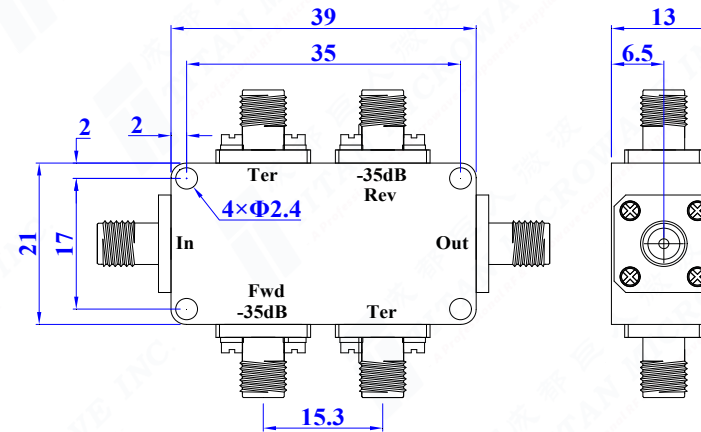

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 12~18GHz, 35dB, 80W, SMA-Female	成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com			
ENGINEER: J. Zhu 30/04/25							
APPROVED: C. Chen 30/04/25							
TOLERANCE UNLESS OTHERWISE SPECIFIED							
x	±0.50	[0.019"]	PART No.: TDDC-12001800-35S80	DIMENSIONS IN MILLIMETERS(mm)			
.x	±0.20	[0.008"]					
.xx	±0.10	[0.004"]					
ANGLES	±1°						
			SIZE:	SCALE:	SHEET:	REV:	
			A4		1/1	A	