

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	350~2000MHz
Coupling	40±1.0dB
Coupling Flatness	±1.0dB max
Insertion Loss	0.35dB max
Primary Line VSWR	1.3:1 max
Coupled Line VSWR	1.5:1 max
Directivity	20dB min
Impedance	50 Ohms
Primary Line Power	30W(CW)

► Mechanical Data

Primary Line Connectors	SMA-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	65×50×20mm

► Environmental Data

Operating Temperature	-40℃~+70℃
-----------------------	-----------

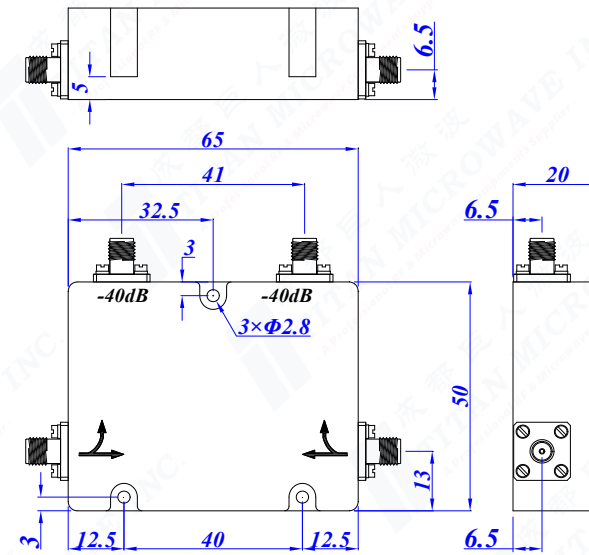

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25	
ENGINEER: J. Zhu 30/04/25	
APPROVED: C. Chen 30/04/25	
TOLERANCE UNLESS OTHERWISE SPECIFIED	
x	±0.50 [0.019"]
.x	±0.20 [0.008"]
.xx	±0.10 [0.004"]
ANGLES	±1°

TITLE:

Dual Directional Coupler,
350~2000MHz, 40dB, 30W,
SMA-Female

PART No.:

TDDC-00350200-40S30



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------