

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2000~2400MHz
Insertion Loss	0.35dB max
VSWR	1.25:1 max
Isolation	22dB min
Amplitude Balance	±0.15dB max
Phase Balance	±3°
Impedance	50 Ohms
Power Rating	20W

► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	76×60×13mm
Surface Finish	Gray Painted

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

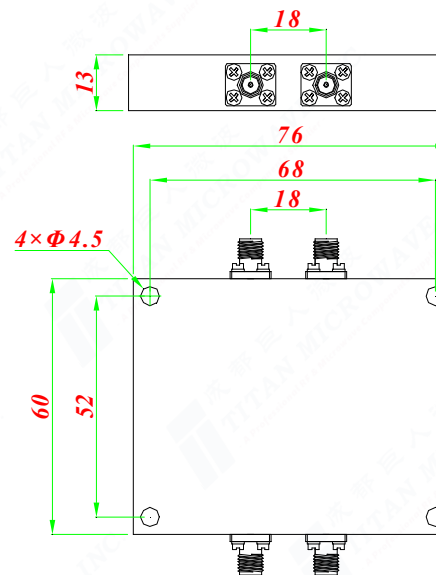

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22	TITLE: 3dB 180° Hybrid Coupler, 2000~2400MHz, 20W, SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i>			
ENGINEER: J. Zhu 21/12/22		www.titan-microwave.com			
APPROVED: C. Chen 21/12/22		 DIMENSIONS IN MILLIMETERS(mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED					
x ±0.50 [0.019"]	PART No.: TMHC180-02000240-20S	SIZE:	SCALE:	SHEET:	REV:
.x ±0.20 [0.008"]		A4		1/1	A
.xx ±0.10 [0.004"]					
ANGLES ±1°					