

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2000~5000MHz
Insertion Loss(average)	0.5dB max
VSWR	1.5:1 max
Isolation	15dB min
Amplitude Balance	±0.5dB max
Phase Balance	±5° max
Impedance	50 Ohms
Power Rating	1000W(CW)

► Mechanical Data

Input/Output Connectors	DIN 7/16(L29)-Female & Mini DIN 4.3-10 -Female
Dimensions	100×41×35mm
Surface Finish	Natural Color Conductive Oxidation

► Environmental Data

Operating Temperature	-55℃~+70℃
-----------------------	-----------

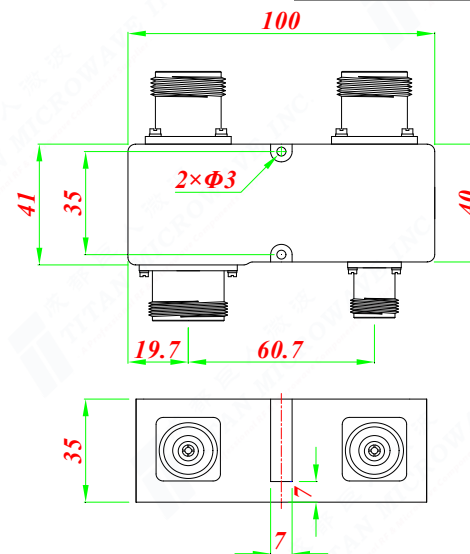

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

3dB 90° Hybrid Coupler,
2000~5000MHz, 1000W,
DIN 7/16(L29)-Female &
Mini DIN 4.3-10 -Female

PART No.:

TMHC90-02000500-1000D



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------