

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	400~700MHz
Insertion Loss(average)	0.25dB max
VSWR	1.3:1 max
Isolation	20dB min
Amplitude Balance	±0.5dB max
Phase Balance	±3° max
Impedance	50 Ohms
Power Rating	800W(CW), 5000W(PK)

► Mechanical Data

Connectors	N-Female & $\Phi 1.5$ mm Pin
Dimensions	214×48×30mm
Surface Finish	Natural Color Conductive Oxidation

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

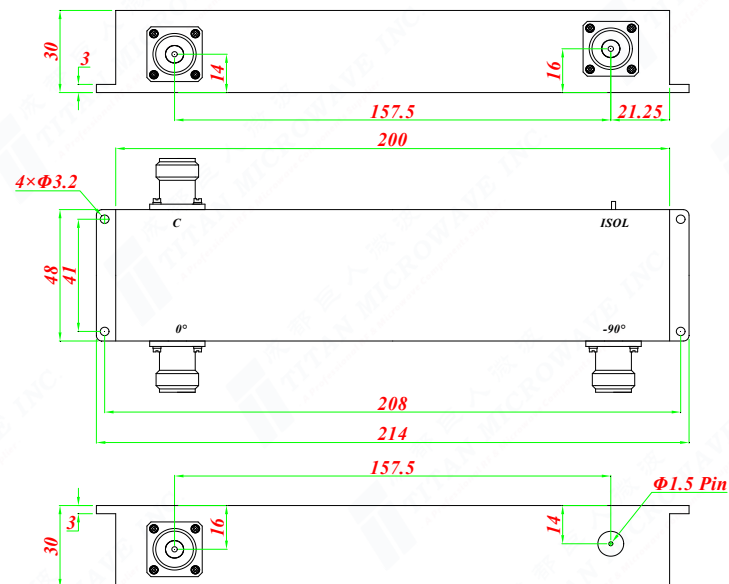

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22			TITLE: 3dB 90° Hybrid Coupler, 400~700MHZ, 800W, N-Female		 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com					
ENGINEER: J. Zhu 21/12/22										
APPROVED: C. Chen 21/12/22					PART No.: TMHC90-00400070-800N		 DIMENSIONS IN MILLIMETERS(mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED										
x	±0.50	[0.019"]								
.x	±0.20	[0.008"]								
.xx	±0.10	[0.004"]								
ANGLES	±1°									
			SIZE: A4		SCALE:		SHEET: 1/1		REV: A	