

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	100~200MHz
Insertion Loss	0.1dB max
VSWR	1.2:1 max
Coupling	20±1.0dB
Directivity	25dB min
Power(main line)	200W(CW)


► Mechanical Data

Dimensions	25.4×12.7×2.5mm
Connector Type	SMD
Surface Finish	Immersion Gold


► Environmental Data

Operating Temperature	-55℃~+105℃
-----------------------	------------


Pin Configuration




Top View

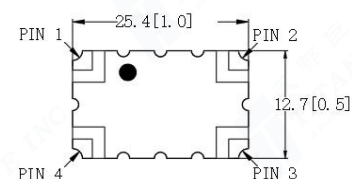

Side View



Bottom View

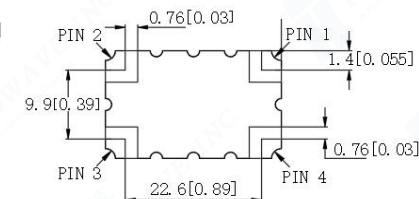

Pin 1	Pin 2	Pin 3	Pin 4
Input	Transmission	Isolate	Coupling
Transmission	Input	Coupling	Isolate

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22
ENGINEER: J. Zhu 16/04/22
APPROVED: C. Chen 16/04/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:

SMD Directional Coupler,
100~200MHz, 20dB,
200W

PART No.:

TMDC0150B20



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE:	SCALE:	SHEET:	REV:
A4		1/1	A