

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	1000~4000MHz
Insertion Loss	0.2dB max
VSWR	1.2:1 max
Coupling	25±1.2dB
Directivity	20dB min
Power Handling	150W(CW)


► Mechanical Data

Dimensions	25.4×12.7×1.3mm
Connector Type	SMD
Surface Finish	Immersion Gold

► Environmental Data

Operating Temperature	-55℃~+105℃
-----------------------	------------


Pin Configuration



Top View

Side View

Bottom View

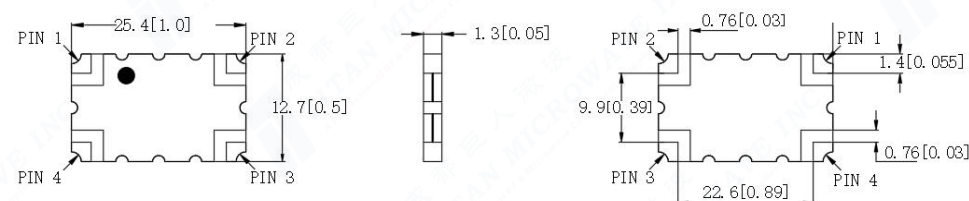

Pin 1	Pin 2	Pin 3	Pin 4
Input	Direct	Isolatd	Coupled
Direct	Input	Coupled	Isolatd
Isolatd	Coupled	Input	Direct
Coupled	Isolatd	Direct	Input

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22		
ENGINEER: J. Zhu 16/04/22		
APPROVED: C. Chen 16/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

SMD Directional Coupler,
1000~4000MHz,
25dB, 150W

PART No.:

TMDC2500B25



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------