

TECHNICAL DATA

► Electrical Data

Frequency Range	300~3000MHz
Insertion Loss	0.26dB max
VSWR	1.2:1 max
Coupling	40±1.2dB
Directivity	23dB min
Power Handling	150W(CW)


► Mechanical Data

Dimensions	20×17×1.8mm
Connector Type	SMD
Surface Finish	Immersion Gold

► Environmental Data

Operating Temperature	-55℃~+105℃
-----------------------	------------

Pin Configuration

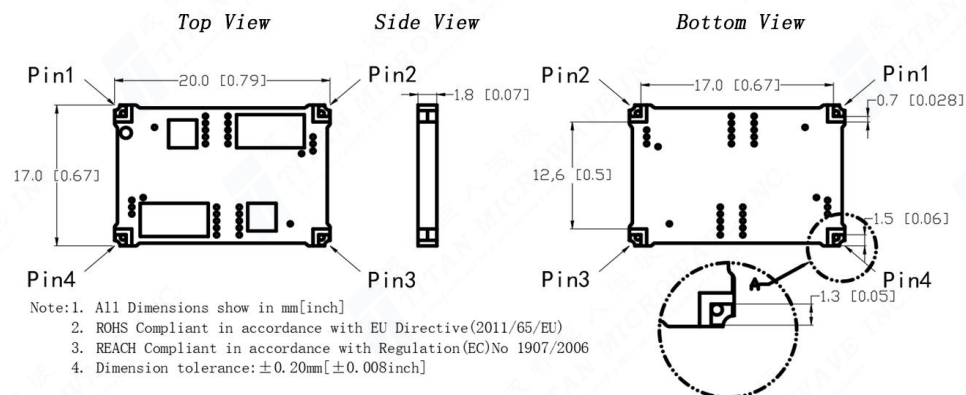

Pin 1	Pin 2	Pin 3	Pin 4
Input	Reflected Coupled	Transmission	Forward Coupled
Transmission	Forward Coupled	Input	Reflected Coupled

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22		
ENGINEER: J. Zhu 16/04/22		
APPROVED: C. Chen 16/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
SMD Directional Coupler,
300-3000MHz,
40dB, 150W

PART No.:
TMDC1650W40S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------