

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/4/12	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1000~2000MHz
Coupling	30±1.0dB
Coupling Flatness	±1.0dB max
Insertion Loss	0.16dB max
VSWR(Primary Line)	1.25:1 max
Directivity	12dB min
Main Line Power	120W

► Mechanical Data

Connector Type	SMD
Surface Finish	Immersion Gold
Dimensions	14.22×8.89×2.6mm max

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

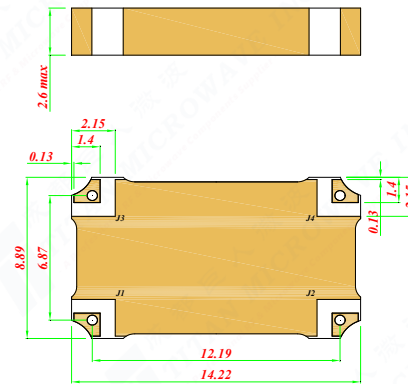

IN	OUT	COUPLED
J2	J1	J4

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/04/23		
ENGINEER: J. Zhu 12/04/23		
APPROVED: C. Chen 12/04/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:	SMD Directional Coupler, 1000~2000MHz, 120W, 30dB
PART No.:	TM0131-30

 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com			
 DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A