


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

## TECHNICAL DATA

### ► Electrical Characteristic

Frequency Range	DC~40GHz
Impedance	50 Ohms
VSWR	1.2:1 max
Mating Cycles	500 min
Withstanding Voltage	100 Vrms

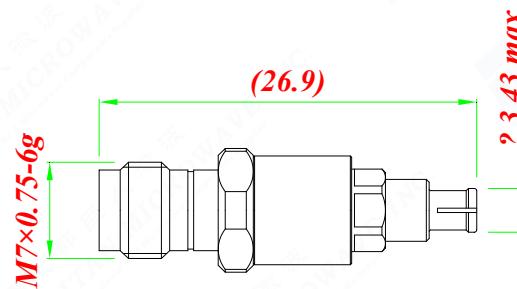

### ► Material & Finishing

Center Conductor	Beryllium Copper, Gold Plated
Outer Conductor	Passivated Stainless Steel(2.4mm-Female) Beryllium Copper, Gold Plated(SMP-Female)
Insulators	PEI & PTFE

### ► Environmental

Temperature Range	-40°C~+125°C
-------------------	--------------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22	TITLE:	TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -		
ENGINEER: J. Zhu 26/03/22				
APPROVED: C. Chen 26/03/22				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x $\pm 0.50$ [0.019"] .x $\pm 0.20$ [0.008"] .xx $\pm 0.10$ [0.004"] ANGLES $\pm 1^\circ$	PART No.:	DIMENSIONS IN MILLIMETERS(mm)		
	TMCAWFPF	SIZE: A4	SCALE: 1/1	REV: A