


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

## TECHNICAL DATA

## ► Electrical Characteristic

Frequency Range	DC~50GHz
Impedance	50 Ohms
VSWR	1.3:1 max
Withstanding Voltage	100 Vrms
Mating Cycles	500 min
Engagement Force	Full Detent:≤19N
Disengagement Force	Full Detent:≥29N

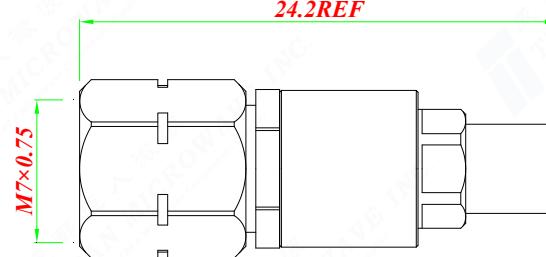

## ► Material & Finishing

Center Conductor	Beryllium Copper, Gold Plated
Outer Conductor	2.4mm-Male: Passivated Stainless Steel SSMP-Male: Passivated Stainless Steel
Insulators	PEI & PTFE

## ► Environmental

Temperature Range -40°C~+125°C

## Notes

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22  
ENGINEER: J. Zhu 26/03/22  
APPROVED: C. Chen 26/03/22  
TOLERANCE UNLESS OTHERWISE SPECIFIED

**TITLE:**  
Coaxial Adapter,  
2.4mm-Male to SSMP-  
Male, Straight,  
DC~50GHz



# 成都巨人微波 **TITAN MICROWAVE INC.**

**DIMENSIONS IN MILLIMETERS(mm)**

PART No.:

SIZE: A4 SCALE: SHEET: 1/1 REV: A