

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

TECHNICAL DATA

► Electrical Characteristic


Frequency Range	DC~33GHz
Impedance	50 Ohms
VSWR	1.15:1 max
Insertion Loss	0.3dB max
Mating Cycles	500 min

► Material & Finishing

Center Conductor	Beryllium Copper, Gold Plated
Outer Conductor	Passivated Stainless Steel
Insulators	PEI

► Environmental

Temperature Range	-40℃~+125℃
-------------------	------------

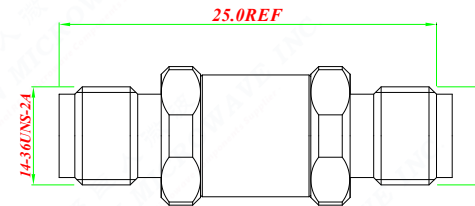

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22			TITLE: Coaxial Adapter, 3.5mm-Female to 3.5mm-Female, Straight, DC~33GHz		成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
ENGINEER: J. Zhu 26/03/22								
APPROVED: C. Chen 26/03/22								
TOLERANCE UNLESS OTHERWISE SPECIFIED			PART No.: TMCAZFZFA		DIMENSIONS IN MILLIMETERS(mm)			
x ±0.50 [0.019"]								
.x ±0.20 [0.008"]								
.xx ±0.10 [0.004"]								
ANGLES ±1°					SIZE: A4	SCALE:	SHEET: 1/1	REV: A