


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

TECHNICAL DATA

► Electrical Characteristic

Frequency Range	DC~40GHz
Impedance	50 Ohms
VSWR	1.15:1 max
Withstanding Voltage	100 Vrms
Mating Cycles	500 min

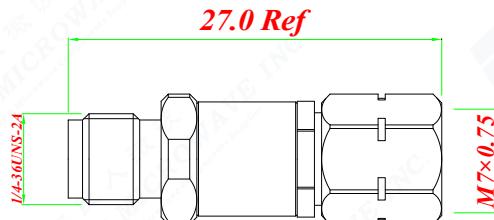

► Material & Finishing

Center Conductor	Beryllium Copper, Gold Plated
Outer Conductor	Passivated Stainless Steel
Insulators	PEI

► Environmental

Temperature Range	-40°C~+125°C
-------------------	--------------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22
ENGINEER: J. Zhu 26/03/22
APPROVED: C. Chen 26/03/22
TOLERANCE UNLESS OTHERWISE SPECIFIED

x ± 0.50 [0.019"]
 $.x$ ± 0.20 [0.008"]
 $.xx$ ± 0.10 [0.004"]
 ANGLES $\pm 1^\circ$

TITLE:
 Coaxial Adapter,
 2.92mm-Female to
 2.4mm-Male, Straight,
 DC~40GHz

PART No.:
 TMCAKFWA

 **成都巨人微波**
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

		DIMENSIONS IN MILLIMETERS(mm)		
SIZE: A4	SCALE: 1/1	SHEET: 1/1	REV: A	