


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

## TECHNICAL DATA

### ► Electrical Characteristic

Frequency Range	DC~33GHz
Impedance	50 Ohms
VSWR	1.15:1 max
Withstanding Voltage	100 Vrms
Mating Cycles	500 min

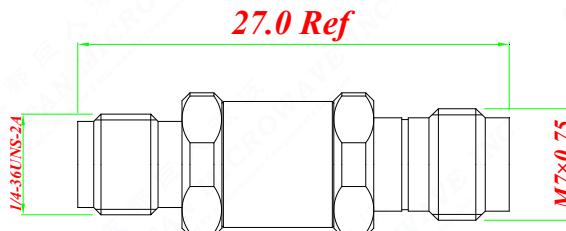

### ► Material & Finishing

Center Conductor	Beryllium Copper, Gold Plated
Outer Conductor	Passivated Stainless Steel
Insulators	PEI

### ► Environmental

Temperature Range	-40°C~+125°C
-------------------	--------------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22	TITLE:	 成都巨人微波 <b>TITAN MICROWAVE INC.</b> <i>- A Professional RF &amp; Microwave Components Supplier -</i>		
ENGINEER: J. Zhu 26/03/22	2.4mm-Female, Straight, DC~33GHz			
APPROVED: C. Chen 26/03/22				
TOLERANCE UNLESS OTHERWISE SPECIFIED	PART No.:	TMCAZFWFA	DIMENSIONS IN MILLIMETERS(mm)	
x $\pm 0.50$ [0.019"] .x $\pm 0.20$ [0.008"] .xx $\pm 0.10$ [0.004"] ANGLES $\pm 1^\circ$	SIZE:	SCALE:	SHEET:	REV:
	A4		1/1	A