

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

TECHNICAL DATA

► Electrical Characteristic


Frequency Range	DC~33GHz
Impedance	50 Ohms
VSWR	1.15:1 max
Withstanding Voltage	100 Vrms
Mating Cycles	500 min

► Material & Finishing

Center Conductor	Beryllium Copper, Gold Plated
Outer Conductor	Passivated Stainless Steel
Insulators	PEI

► Environmental

Temperature Range	-40℃~+125℃
-------------------	------------

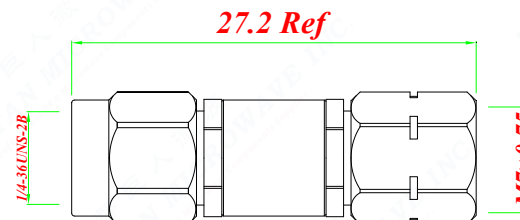

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22		
ENGINEER: J. Zhu 26/03/22		
APPROVED: C. Chen 26/03/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Coaxial Adapter,
3.5mm-Male to 2.4mm-
Male, Straight,
DC~33GHz

PART No.:
TMCAZWA



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------