


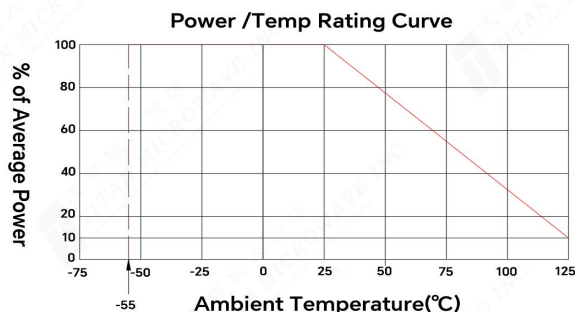

Datasheet

Model Number : TMFA6Q2-**xx**

Coaxial Fixed Attenuator, DC-6GHz

1-40dB, QMA-Male to QMA-Female, 2W

Specifications

xx indicates Attenuation value in dB

Frequency Range	DC-6GHz					
VSWR	1.30:1 max					
Nominal Power Handling	2W@25°C					
Impedance	50 Ohms					
Attenuation	1-10dB	12dB	15dB	20dB	30dB	40dB
Attenuation Accuracy(dB)	±0.5	±0.6	±0.7	±0.75	±0.8	±1.5
Durability	500 Cycle min					
Connectors	QMA-Male to QMA-Female					
Center Conductor	Beryllium Copper Gold Plated					
Connector	Brass, Suco Plated					
Operating Temperature	-40°C~+125°C					
RoHS Status	RoHS Compliant					

Outline Drawing [mm[inch]]:

