

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	400~430MHz
Insertion Loss	0.25dB max
VSWR	1.15:1 max
Isolation	25dB min
Forward Power	300W
Reverse Power	100W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	45×80×24mm
Connector	N-Female
Material	Aluminum
Surface Finish	Nickel Plated

► Environmental Data

Operating Temperature	-30℃~+70℃
Storage Temperature	-40℃~+90℃

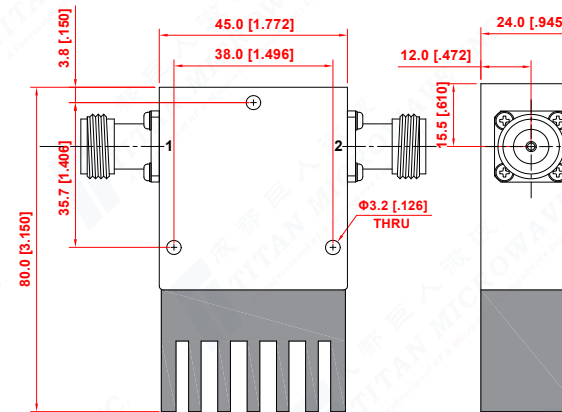

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23			TITLE: Coaxial Isolator 400-430MHz, 300W, N-Female	成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com				
ENGINEER: J. Zhu 16/09/23				PART No.: TMCI-00400043-300N	DIMENSIONS IN MILLIMETERS(mm)			
APPROVED: C. Chen 16/09/23					SIZE:	SCALE:	SHEET:	REV:
TOLERANCE UNLESS OTHERWISE SPECIFIED					A4		1/1	A
x	±0.50	[0.019"]						
.x	±0.20	[0.008"]						
.xx	±0.10	[0.004"]						
ANGLES	±1°							