

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/6/15	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	3000~3500MHz
Insertion Loss	1.0dB max
(excluding theoretical insertion loss 10.8dB)	
Isolation	20dB min
Input VSWR	1.70 max
Output VSWR	1.40 max
Amplitude Balance	±0.5dB max
Phase Balance	±8°
Forward Power	20W
Reverse Power	1W
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	156×92×10mm
Input Connector	SMA-Female
Output Connectors	SMA-Female
Surface Finish	Grey/Black/Blue Painted

### ► Environmental Data

Operating Temperature	-40°C~+80°C
Storage Temperature	-45°C~+85°C

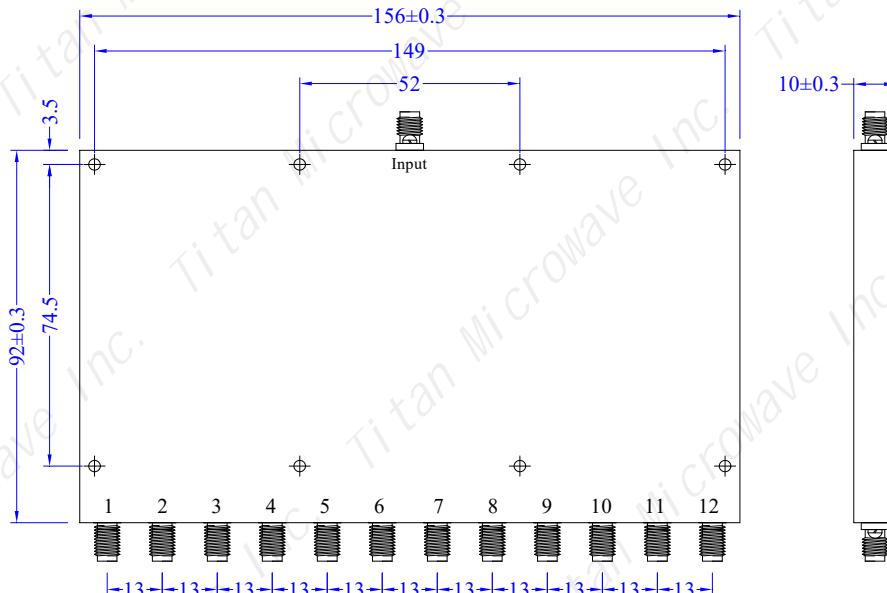

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 15/06/22	TITLE:  Power Divider, 12-Way, 3-3.5GHz, 20W, SMA- Female	PART No.:  TMPD12-03000350-20S	 <b>TITAN MICROWAVE INC.</b> <i>- A Professional RF &amp; Microwave Components Supplier -</i> <a href="http://www.titan-microwave.com">www.titan-microwave.com</a>
ENGINEER: J. Zhu 15/06/22			
APPROVED: C. Chen 15/06/22			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
x ±0.50 [0.019"]			
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			
	DIMENSIONS IN MILLIMETERS(mm)		
	SIZE: A4	SCALE:	SHEET: 1/1 REV: A