

TECHNICAL DATA

► Electrical Data

Frequency Range	690~6000MHz
Insertion Loss	0.9dB max
VSWR	1.5:1 max
Isolation	15dB min
Phase Balance	±6°
Amplitude Balance	±1.1dB max
Power Handling	130W


► Mechanical Data

Dimensions	25.4×12.7×2.8mm
Connector Type	SMD
Surface Finish	Immersion Gols
	-provent surface from oxidation and scratch


► Environmental Data

Operating Temperature	-55℃~+105℃
-----------------------	------------


Pin Configuration




Top View



Side View



Bottom View

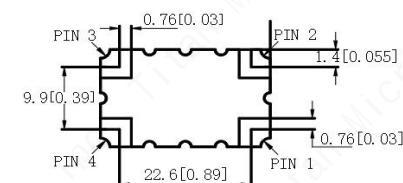

Configurati on	Pin 1	Pin 2	Pin 3	Pin 4
Splitter	Input	-3dB ∠θ-90°	-3dB ∠θ	Isolated
Splitter	-3dB ∠θ-90°	Input	Isolated	-3dB ∠θ
Splitter	-3dB ∠θ	Isolated	Input	-3dB ∠θ-90°
Splitter	Isolated	-3dB ∠θ	-3dB ∠θ-90°	Input
Combiner	Isolated	-3dB ∠θ-90°	-3dB ∠θ	Output
Combiner	-3dB ∠θ-90°	Isolated	Output	-3dB ∠θ
Combiner	-3dB ∠θ	Output	Isolated	-3dB ∠θ-90°
Combiner	Output	-3dB ∠θ	-3dB ∠θ-90°	Isolated

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 22/11/22
ENGINEER: J. Zhu 22/11/22
APPROVED: C. Chen 22/11/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:

SMD 3dB 90° High Power
Hybrid Coupler,
690-6000MHz, 130W

PART No.:

TMHC3350W03



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE:
A4

SCALE:

SHEET:
1/1

REV:
A