

TECHNICAL DATA

► Electrical Data


Frequency Range	2~32MHz
Nominal Coupling	30±0.5dB
Insertion Loss	0.2dB max
Primary Line VSWR	1.1:1 max
Directivity	20dB
Impedance	50 Ohms
Power Rating	200W

► Mechanical Data

Input/Output Connectors	SMA-Female
Coupled Connector	SMA-Female
Body Material	Aluminum
Surface Finish	Conductive Oxide
Dimensions	45×35×22.35mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

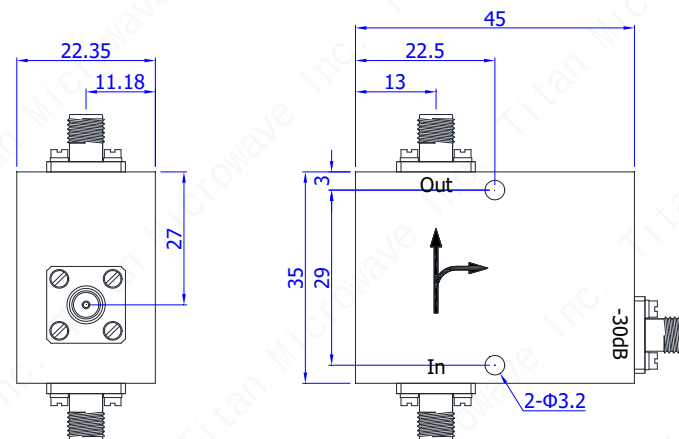

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/3/24	C. Chen

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 24/03/25
ENGINEER: J. Zhu 24/03/25
APPROVED: C. Chen 24/03/25
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:

Single Directional Coupler,
2~32MHz
Coupling 30dB, 200W
SMA-Female

PART No.:

TMDC-2M32M-30S200



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------