


REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/3/26	C. Chen

TECHNICAL DATA

► Electrical Characteristic

Frequency Range	DC~26.5GHz
Impedance	50 Ohms
VSWR	1.15:1 max
Withstanding Voltage	100 Vrms
Mating Cycles	500 min

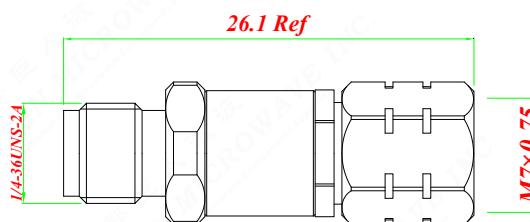

► Material & Finishing

Center Conductor	Beryllium Copper, Gold Plated
Outer Conductor	Passivated Stainless Steel
Insulators	PEI

► Environmental

Temperature Range	-40°C~+125°C
-------------------	--------------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 26/03/22	ENGINEER: J. Zhu 26/03/22	APPROVED: C. Chen 26/03/22	TITLE: Coaxial Adapter, SMA-Female to 1.85mm- Male, Straight, DC~26.5GHz		 成都巨人微波 TITAN MICROWAVE INC. <i>- A Professional RF & Microwave Components Supplier -</i>	
TOLERANCE UNLESS OTHERWISE SPECIFIED		x ± 0.50 [0.019"] .x ± 0.20 [0.008"] .xx ± 0.10 [0.004"] ANGLES $\pm 1^\circ$		  DIMENSIONS IN MILLIMETERS(mm)		
PART No.: TMCASFVA		SIZE: A4	SCALE: 1/1	SHEET: 1/1	REV: A	